

LTN8704-P4/8708-P8/8716-P8

Embedded Plug & Play NVR



LTN8704-P4




LTN8708-P8/LTN8716-P8

Key features

- Third-party network cameras supported
- Up to 6 Megapixels resolution recording
- HDMI and VGA output at up to 1920 × 1080P resolution
- Up to 2 SATA interfaces, up to 6TB for each disk
- Support NAS, IP SAN Network Storage
- 1xPOS(LTN8704-P4), 4xPOS(LTN8708-P8, LTN8716-P8)
- Plug & Play with up to 8 independent PoE network interfaces
- Support network detection, including network delay, packet loss, etc

Rear Panel

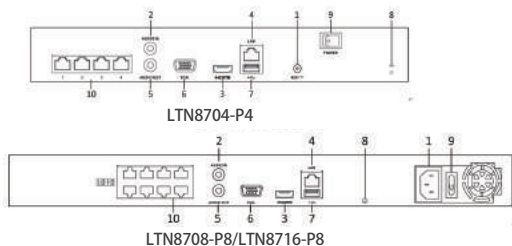

1. Power Supply
2. Audio In
3. HDMI Interface
4. LAN Network Interface
5. Audio Out
6. VGA Interface
7. USB Interface
8. Ground
9. Power Switch
10. Network Interfaces with PoE Function

| | LTN8704-P4 | LTN8708-P8 | LTN8716-P8 |
|---------------------------------|--|---|------------|
| Video/Audio input | | | |
| IP video input | 4-ch | 8-ch | 16-ch |
| Two-way audio input | 1-ch, RCA (2.0 Vp-p, 1kΩ) | | |
| Network | | | |
| Incoming bandwidth | 40Mbps | 80Mbps | 160Mbps |
| Outgoing bandwidth | 80Mbps | | |
| Remote connection | 128 | | |
| Video/Audio output | | | |
| Recording resolution | 6MP/5MP/3MP/1080P/UXGA/720P/VGA/4CIF/DCIF/2CIF/CIF/QCIF | | |
| Frame rate | Main stream: 50 fps (P) / 60 fps (N) | | |
| | Sub-stream: 50 fps (P) / 60 fps (N) | | |
| HDMI/VGA output | 1-ch, resolution: 1920 × 1080P /60Hz, 1600 × 1200 /60Hz, 1280 × 1024 /60Hz, 1280 × 720 /60Hz, 1024 × 768 /60Hz | | |
| Audio output | 1-ch, RCA (Linear, 1kΩ) | | |
| Decoding | | | |
| Live view / Playback resolution | 6MP/5MP/3MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF | | |
| Capability | 4-ch | 8-ch | 16-ch |
| Hard disk | | | |
| SATA | 1 SATA interface for 1 HDD | 2 SATA interface for 2 HDDs | |
| Capacity | Up to 6TB for each disk | | |
| External interface | | | |
| Network interface | 1 RJ-45 10 /100 /1000 Mbps self-adaptive Ethernet interface | | |
| USB interface | 1 × USB 2.0 and 1 × USB 3.0 | | |
| PoE | | | |
| PoE Interface | 4 independent 100 Mbps PoE | 8 independent 100 Mbps PoE | |
| Max. Power | 50W | 120W | |
| Standard | AF and AT | | |
| Others | | | |
| Power supply | 48V DC | 100 ~ 240 VAC, 47 ~ 63 Hz, 3A | |
| Consumption (without harddisk) | ≤ 10W | | |
| Working temperature | -10 ° C ~ +55 ° C (14° F~131° F) | | |
| Working humidity | 10 % ~ 90 % | | |
| Chassis | 1U chassis | 19-inch rack-mounted 1U chassis | |
| Dimensions (W × D × H) | 315 × 230 × 45mm (12.4 × 9.1 × 1.8 inch) | 445 × 290 × 45mm (17.5 × 11.4 × 1.8 inch) | |
| Weight (without hard disk) | ≤ 2 Kg (4.4 lb) | ≤ 4 Kg (8.8 lb) | |